

Solder Wave Masking Discs

SWD Series

RoHS & REACH Compliant


Solder Wave Masking Discs are made from crepe paper with rubber adhesive that can be removed cleanly without leaving any residue. They are ideal for use in wave soldering process to mask sensitive components and high temperature paint operations. They can withstand molten solder for 5-8 seconds at 500° F. These discs may serve as High Temperature Masking Discs.

Applications

- 3D Printing and Aerospace Assembly
- Automotive Facilities and Electronic Assembly
- Fiber Optics Manufacturing and Solar Panels

Product Specifications ⁽¹⁾

Color	Tan
Adhesion Type	Rubber/Resin
Total Thickness	6.5 Mil
Material	Crepe Paper
Adhesion to Steel	41 oz./in.
Tensile Strength	22 lbs./in
Elongation	7.5 %
Core	3 in. Cardboard Core
Operating Temperature	1.5 hours @ 300° F 2 hours @ 275° F 3 hours @ 250° F

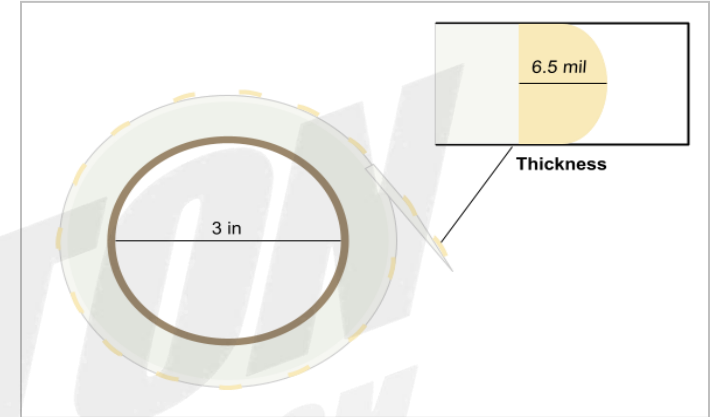

⁽¹⁾ Specifications are subject to change at any time. If you have any questions, please contact us for the latest update.

Bertech® makes no warranty, representation, or guarantee regarding the information contained herein or the suitability of its this product for any particular purpose, nor does Bertech® assume any liability whatsoever arising out of the application or use of this product. It is ultimately the responsibility of the customer to determine a product's suitability for a particular application.



KaptonTape
640 Maple Ave
Torrance, CA 90503
Phone: (310) 787-0337
Email: sales@kaptontape.com
www.kaptontape.com

PRODUCT DATA SHEET