

ESD Printed Tape

ESDCT3P Series

RoHS & REACH Compliant

ESD Printed Tapes with ESD Symbol are made from 2 mil clear cellulose material with a printed ESD symbol. They are coated with a solvent based natural rubber adhesive, which provides excellent tack and holding power. They are ideal for general packaging in environments where static is an issue. These tapes are available on a 3" core and are 72 yards long.


Applications

- General packaging in environments where static charge is an issue
- Computer Technicians and Electronic Assembly
- Fiber Optics Manufacturing, Hospitals, and Solar Industries

Product Specifications ⁽¹⁾

Color	Clear with ESD symbol
Adhesion Type	Rubber
Grid Material	Cellulose Cellophane Film
Total Thickness	2 Mil
Tensile Strength	25 lbs./in
Elongation	18%
Static Generation	< 250 volts @ 50% RH
Operating Temperature	60°C (140°F)
Adhesion to Steel	66 Oz./in
Static Decay	<0.014 Seconds
Length	72 Yards
Core	3 in. Plastic Core

⁽¹⁾ Specifications are subject to change at any time. If you have any questions, please contact us for the latest update.

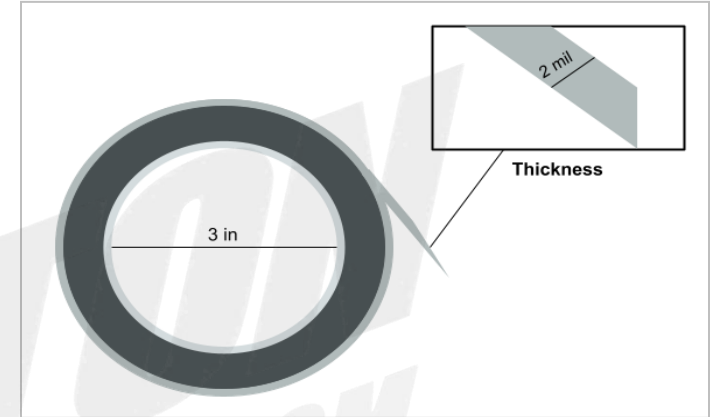

Bertech® makes no warranty, representation, or guarantee regarding the information contained herein or the suitability of its this product for any particular purpose, nor does Bertech® assume any liability whatsoever arising out of the application or use of this product. It is ultimately the responsibility of the customer to determine a product's suitability for a particular application.



KaptonTape
640 Maple Ave
Torrance, CA 90503
Phone: (310) 787-0337
Email: sales@kaptontape.com
www.kaptontape.com

PRODUCT DATA SHEET